


IP20 IP44 ADJ.  LED 0-10V DIM 



100mm adjustable ownlight
 Mounting method : recessed ceiling mounted
 Material : aluminium housing and aluminium reflector
 Standard finishes : matt white / matt black
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

MINI iL

Adjustable 15° tilting angle.
 Completed with Lumileds replaceable led module.
 Remote led driver.
 Dimension in mm : Ø100 x 135 ; Cut Hole : Ø92

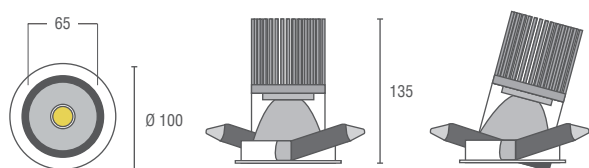


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	850lm	2700K	24°
10W	1000lm	3000K	38°
13W	1400lm	4000K	60°
18W	2000lm	5000K	

MINI iX

Adjustable 15° tilting angle.
 Completed with Xicato replaceable led module.
 Remote led driver.
 Dimension in mm : Ø100 x 132 ; Cut Hole : Ø92

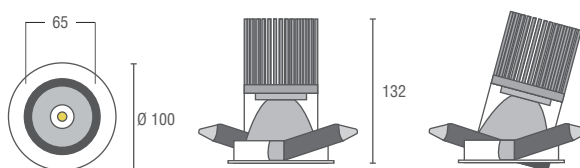

XICATO LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	25°
22W	2000lm	4000K	36°
32W	3000lm		48°