


IP20 IP44 ADJ.   LED 0-10V DIM 

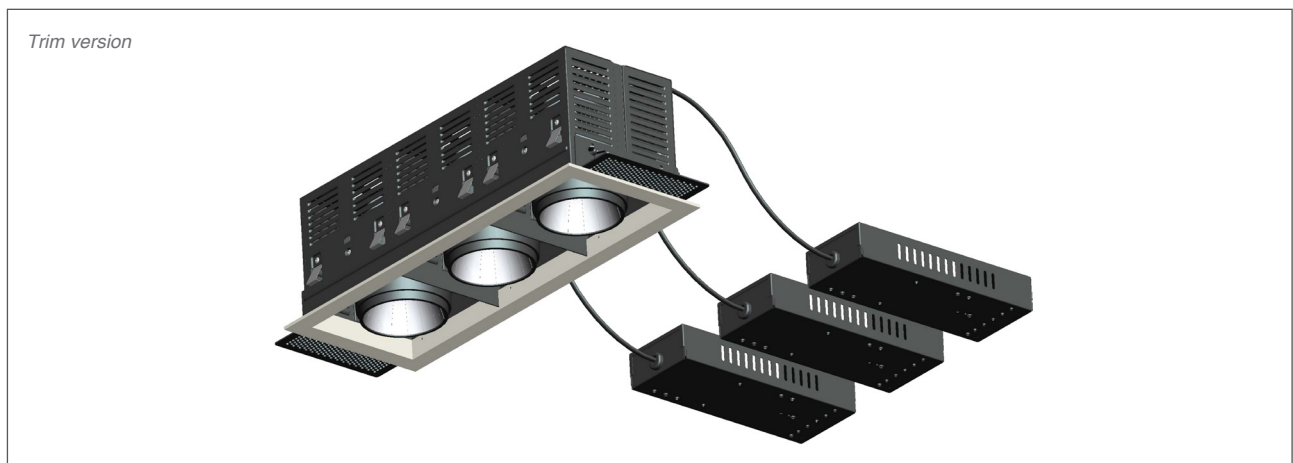


Recessed square adjustable downlight with trim and trimless version
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing
 Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

EDGE - 1 Module

360° Rotating angle and $\pm 15^\circ$ tilting angle.
Completed with Philips / Lumileds / Xicato replaceable led module.
Remote led driver.


Trim Version :

Dimension in mm : 175 x 175 x 147 ; Cut Hole : 146 x 144

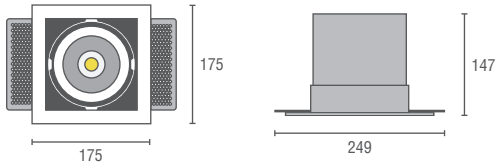

Trimless Version :

Dimension in mm : 146 x 144 x 147 ; Cut Hole : 146 x 144

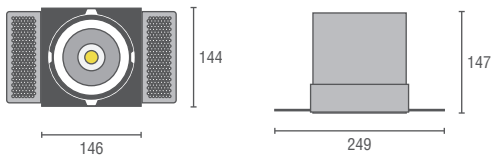


EDGE - 2 Module

360° Rotating angle and $\pm 15^\circ$ tilting angle.
Completed with Philips / Lumileds / Xicato replaceable led module.
Remote led driver.


Trim Version :

Dimension in mm : 320 x 171 x 147 ; Cut Hole : 291 x 144

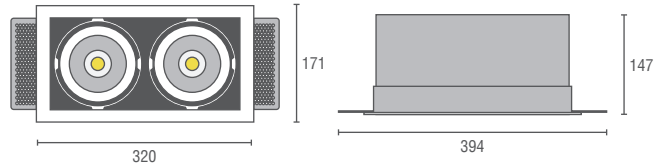

Trimless Version :

Dimension in mm : 291 x 144 x 147 ; Cut Hole : 291 x 144

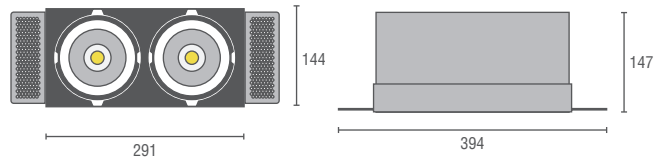

EDGE - 3 Module

360° Rotating angle and $\pm 15^\circ$ tilting angle.
Completed with Philips / Lumileds / Xicato replaceable led module.
Remote led driver.

Trim Version :

Dimension in mm : 452 x 171 x 147 ; Cut Hole : 426 x 144



Trimless Version :

Dimension in mm : 426 x 144 x 147 ; Cut Hole : 426 x 144



PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
15W	1400lm	3000K	27°
30W	3000lm	4000K	37°

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	850lm	2700K	27°
10W	1000lm	3000K	37°
13W	1400lm	4000K	
18W	2000lm	5000K	
29W	3000lm		

XICATO LED CRI 83

Wattage	Lumen	CCT	BeamAngle
7.8W	700lm	2700K	27°
11.7W	1300lm	3000K	37°
19.5W	2000lm	4000K	
29.3W	3000lm	5000K	

XICATO LED CRI 98

Wattage	Lumen	CCT	BeamAngle
9.7W	700lm	2700K	27°
15.6W	1300lm	3000K	37°
26.4W	2000lm	4000K	
		5000K	

Note : Lamp specification for each module