

# iTROFFER 24

IP20

LED


DIM



1210 x 605mm LED batten  
Mounting method : recessed ceiling mounted. Powder coated steel housing  
Standard finishes : matt white  
IP Rating : IP20  
Customized RAL upon request.  
Dimmable driver available upon request.

## iTROFFER 24

Completed with Philips led module.  
Integrated led driver.  
Dimension in mm : 1210 x 605 x 110

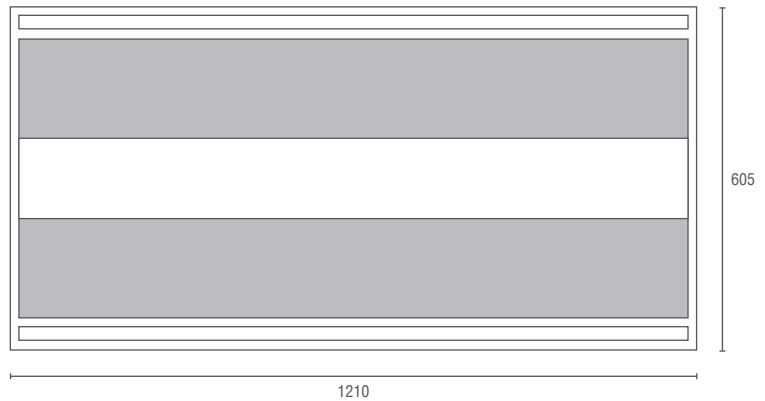

### PHILIPS CERTAFLUX LED CRI 80

Wattage	Lumen	CCT	Beam Angle
50W	6200lm	3000K	120°
72W	8800lm	4000K	
		6500K	

### PHILIPS FORTIMO LED CRI 80

Wattage	Lumen	CCT	Beam Angle
56W	8800lm	3000K	120°
		4000K	
		6500K	