


IP65  LED 0-10V DIM 

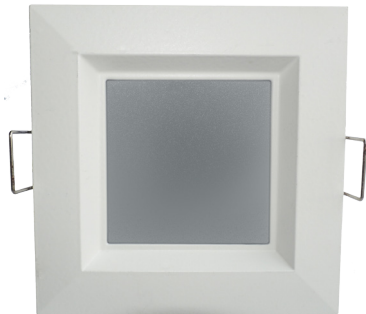


Passive temperature management via heatsinks

IP65 dust and waterproof protection glass

110mm square waterproof LED downlight
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing and trim
 Standard finishes : matt white / matt black
 IP Rating : IP65
 Accessories : frosted glass
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

SQ110

Non-adjustable.
 Completed with Lumileds replaceable led module.
 Remote led driver.
 Dimension in mm : 110 x 110 x 50 ; Cut Hole : 85 x 85

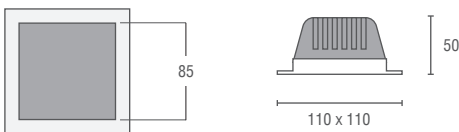

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
14W	1400lm	2700K	Diffused
		3000K	
		4000K	
		5000K	
		6500K	