

LINEAR INGROUND


IP65  LED 0-10V DIM 



Inground LED Linear Light
Mounting method : recessed inground
Material : extruded aluminium housing
Standard finishes : aluminium
IP Rating : IP65
Customized RAL upon request.
Dimmable driver available upon request.

LINEAR INGROUND

Non-adjustable.
Completed with Lumileds led module.
Remote led driver.
Dimension in mm : 1000 x 114 x 130

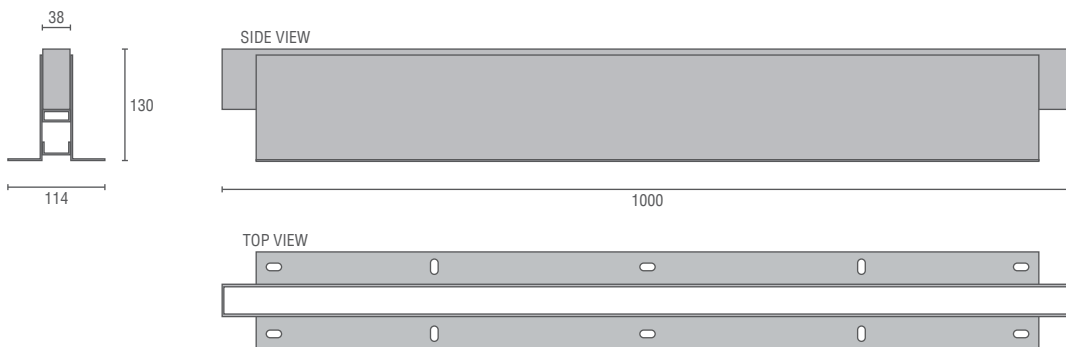

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	Beam Angle
40W	2000lm	2200K 2700K 3000K 4000K 5000K R/G/B	Diffused