


IP20 IP44 ADJ.   LED 0-10V DIM 



67mm pin hole downlight  
 Mounting method : recessed ceiling mounted  
 Material : die cast aluminium housing and trim  
 Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze  
 IP Rating : IP20 / IP44  
 Accessories : clear glass / frosted glass / honeycomb louvre  
 Customized RAL upon request.  
 Dimmable driver available upon request.  
 Emergency kit available upon request.

## PICCOLO

Adjustable 20° tilting angle.  
 Completed with Lumileds replaceable led module.  
 Remote led driver.  
 Dimension in mm : Ø67 x 106 ; Cut Hole : Ø60

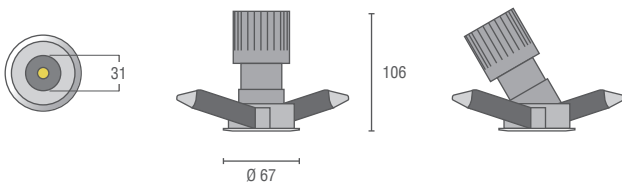

### LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	850lm	2700K	15°
10W	1000lm	3000K	24°
		4000K	36°
		5000K	

### LUMILEDS LED CRI>90

Wattage	Lumen	CCT	BeamAngle
8W	850lm	2700K	15°
10W	1000lm	3000K	24°
		4000K	36°
		5000K	