


IP20 IP44 ADJ. ↘ LED MR16 0-10V DIM ▾


Powder painted die-cast aluminium front trim available in various finishes, customized RAL upon request



Decorative accessory. Standard product with black finish. Different finish available upon request. (For Sniper.pin only)



Pre-installation housing for easy maintenance




Sniper.key with adjustable tilt angle for accent lighting or wallwash effect

113mm pinhole and keyhole downlight
Mounting method : recessed ceiling mounted
Material : die cast aluminium housing and trim
Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
IP Rating : IP20 / IP44
Accessories : clear glass / frosted glass / honeycomb louvre
Customized RAL upon request.
Dimmable driver available upon request.
Emergency kit available upon request.

SNIPER.PIN

Non-adjustable.
Completed with Lumileds replaceable led module.
Remote led driver.
Dimension in mm : Ø113 x 145 ; Cut Hole : Ø102

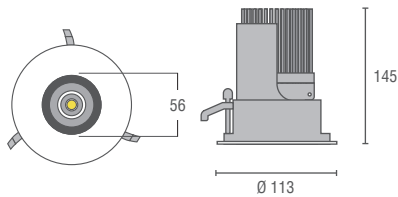


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	1000lm	2700K	15°
10W	1200lm	3000K	24°
15W	1900lm	4000K	38°
18W	2200lm	5000K	60°
21W	2600lm		

SNIPER.PIN.MR16

Non-adjustable.
Completed with Gu5.3 lamp base for low voltage halogen lamp or led lamp.
Electronic transformer is not included.
Dimension in mm : Ø113 x 155 ; Cut Hole : Ø102

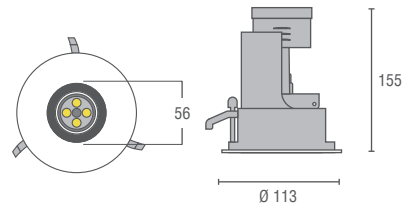


LOW VOLTAGE HALOGEN / LED LAMP

Lamp Base	Voltage
GU5.3	12V

SNIPER.KEY

Adjustable 45° tilting angle.
Completed with Lumileds replaceable led module.
Remote led driver.
Dimension in mm : Ø113 x 145 ; Cut Hole : Ø102

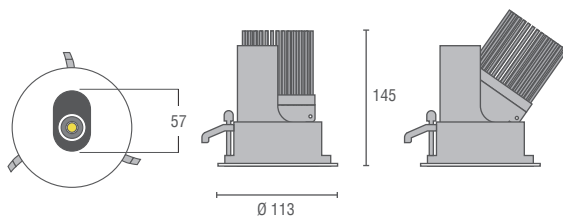


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	1000lm	2700K	15°
10W	1200lm	3000K	24°
15W	1900lm	4000K	38°
18W	2200lm	5000K	60°
21W	2600lm		

SNIPER.KEY.MR16

Adjustable 45° tilting angle.
Completed with Gu5.3 lamp base for low voltage halogen lamp or led lamp.
Electronic transformer is not included.
Dimension in mm : Ø113 x 155 ; Cut Hole : Ø102

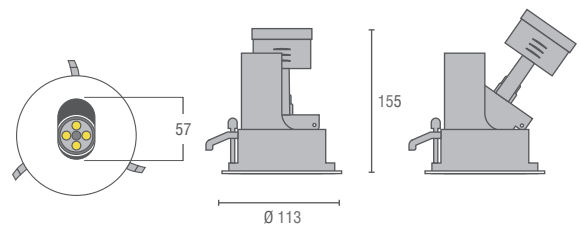

LOW VOLTAGE HALOGEN / LED LAMP

Lamp Base	Voltage
GU5.3	12V