



IP20 IP44  LED 0-10V DIM 

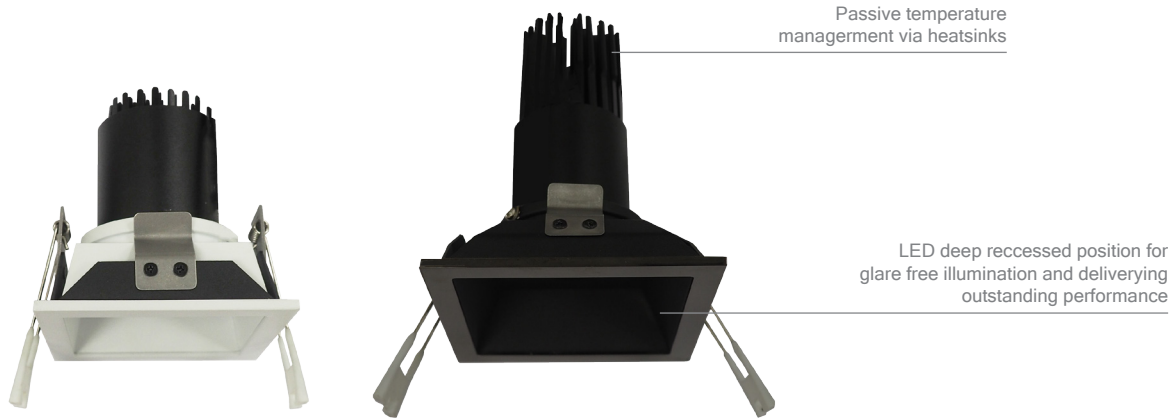

85mm and 100mm square downlight
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing and trim
 Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

SQ85

Non-adjustable.
 Completed with Lumileds / Xicato replaceable led module.
 Remote led driver.
 Dimension in mm : 85 x 85 x 112 ; Cut Hole : 75 x 75

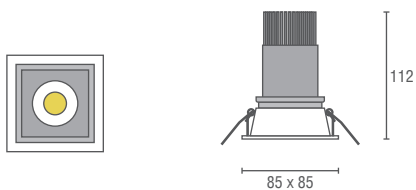

LUMILEDS LED CRI>80


Wattage	Lumen	CCT	BeamAngle
4.4W	500lm	2700K 3000K 4000K	25°

XICATO LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	1000lm	2700K	25°
13W	1400lm	3000K	39°
		3500K	57°
		4000K	

SQ100

Non-adjustable.
 Completed with Lumileds / Xicato replaceable led module.
 Remote led driver.
 Dimension in mm : 100 x 100 x 117 ; Cut Hole : 90 x 90

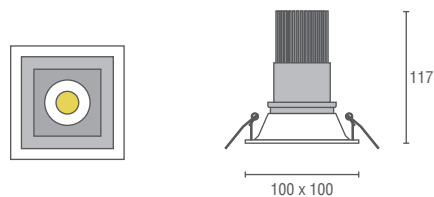

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
4.4W	500lm	2700K 3000K 4000K	25°

XICATO LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	1000lm	2700K	25°
13W	1400lm	3000K	39°
		3500K	57°
		4000K	