


IP20 IP44 ADJ.   LED 0-10V DIM 



58mm adjustable downlight
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing
 Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

AIMS

Adjustable 30° tilting angle.
 Completed with Lumileds replaceable COB led module.
 Remote led driver.
 Dimension in mm : Ø58 x 117 ; Cut hole : Ø54

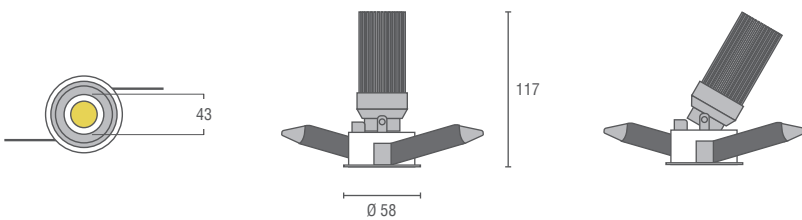

LUMILEDS LED CRI>80

| Wattage | Lumen | CCT | Beam Angle |
|---------|-------|-------|------------|
| 6W | 600lm | 2700K | 30° |
| 8W | 900lm | 3000K | 43° |
| | | 4000K | |
| | | 5000K | |