


IP65  LED 0-10V DIM 



Recessed steplight
 Mounting method : wall recessed mounted
 Material : aluminium front cover, PC frosted diffuser
 Standard finishes : matt white / matt black
 IP Rating : IP65
 Customized RAL upon request.
 Dimmable driver available upon request.

STEP

Non-adjustable.
 Completed with Lumileds replaceable led module.
 Remote led driver.
 Dimension in mm : 120 x 85 ; Cut Hole : 102 x 77

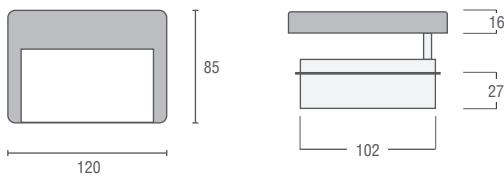

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
3W	400lm	2700K	Diffused
		3000K	
		4000K	
		5000K	

Note : 12Vdc or 220Vac available on request