


IP20 IP44  LED 0-10V 




Recessed downlight
Mounting method : recessed ceiling mounted
Material : aluminium housing and trim
Standard finishes : matt white / matt black
IP Rating : IP20 / IP44
Accessories : clear glass / frosted glass / honeycomb louve.
Customized RAL upon request.
Dimmable driver available upon request.
Emergency kit available upon request.

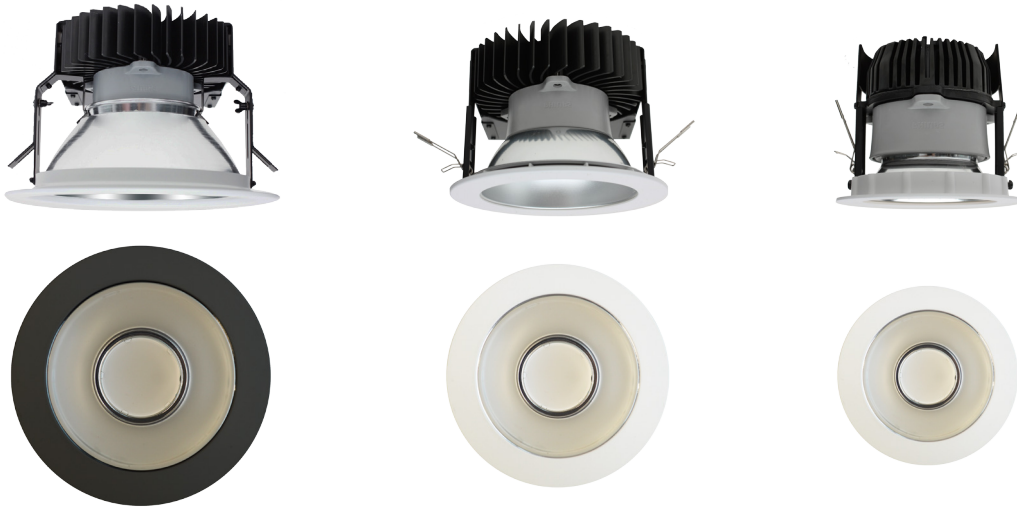

SPOTA MAXI

Non-adjustable.
Completed with Philips replaceable led module.
Remote led driver.
Dimension in mm : Ø226 x 148 ; Cut Hole : Ø195

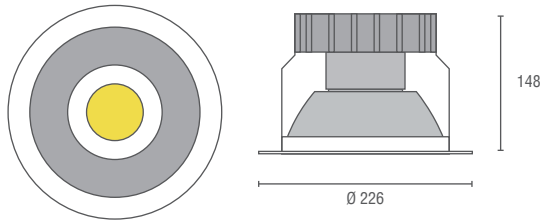


PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
22W	2000lm	4000K	60°
32W	3000lm		90°

SPOTA MIDI

Non-adjustable.
Completed with Philips replaceable led module.
Remote led driver.
Dimension in mm : Ø175 x 154 ; Cut Hole : Ø162

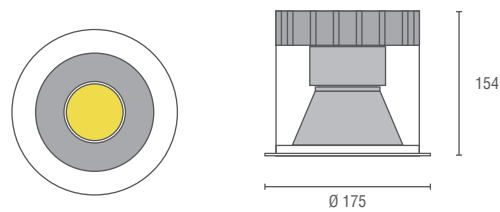


PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
22W	2000lm	4000K	60°
32W	3000lm		90°

SPOTA MINI

Non-adjustable.
Completed with Philips replaceable led module.
Remote led driver.
Dimension in mm : Ø136 x 117 ; Cut Hole : Ø120

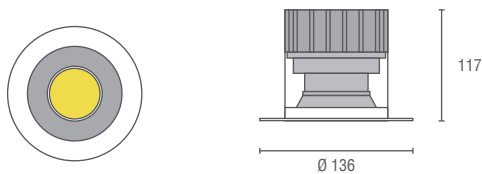

PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
22W	2000lm	4000K	60°