



# TUBULAR


IP44     LED    MR16    0-10V    DIM 



Outdoor downlight  
 Mounting method : surface mounted / pendant mounted  
 Material : die cast aluminium housing  
 Standard finishes : matt white / matt black  
 IP Rating : IP44  
 Accessories : clear glass / frosted glass / honeycomb louvre.  
 Customized RAL upon request.  
 Dimmable driver available upon request.

## TUBULAR

Non-adjustable.  
 Completed with Lumileds replaceable led module.  
 Integrated led driver.  
 Dimension in mm : Ø80 x 180 / Ø80 x 234

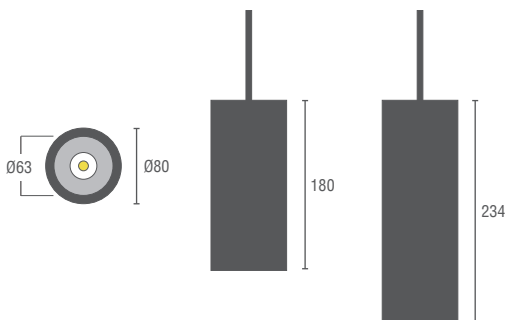


### LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
10W	1000lm	2700K	27°
13W	1400lm	3000K	37°
18W	2000lm	4000K	
29W	3000lm	5000K	

## TUBULAR.MR16

Non-adjustable.  
 Completed with Gu5.3 lamp base for low voltage halogen lamp or led lamp.  
 Electronic transformer is not included.  
 Dimension in mm : Ø80 x 180 / Ø80 x 234

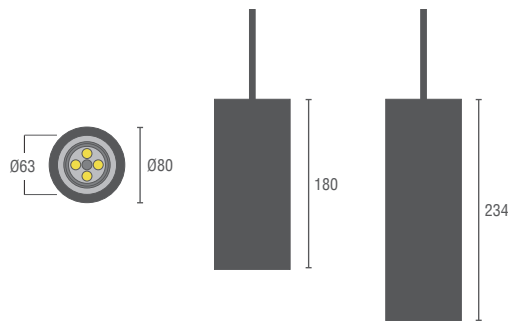

### LOW VOLTAGE HALOGEN / LED LAMP

Lamp Base	Voltage
GU5.3	12V

