


IP20 IP54  LED 0-10V DIM 



88mm LED downlight
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing and trim. Anodised aluminium reflector
 Standard finishes : matt white / matt black
 IP Rating : IP20 / IP54
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

SHADOW

Non-adjustable.
 Completed with Philips replaceable led module.
 Remote led driver.
 Dimension in mm : Ø88 x 112 ; Cut Hole Ø80

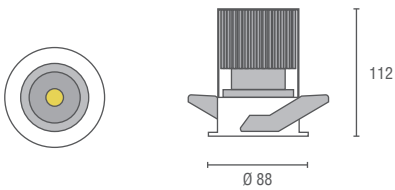

PHILIPS LED CRI>90

Wattage	Lumen	CCT	BeamAngle
10W	1000lm	3000K	20°
15W	1300lm		

