

IP20 IP44 ADJ.  LED 0-10V DIM 




171mm recessed square adjustable downlight
Mounting method : recessed ceiling mounted
Material : die cast aluminium housing and trim
Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
IP Rating : IP20 / IP44
Accessories : clear glass / frosted glass / honeycomb louvre
Customized RAL upon request.
Dimmable driver available upon request.
Emergency kit available upon request.



ELEMENT P

Adjustable $\pm 15^\circ$ tilting angle.
 Completed with Philips replaceable led module.
 Remote led driver.
 Dimension in mm : 171 x 171 x 119 ; Cut Hole : 146 x 146

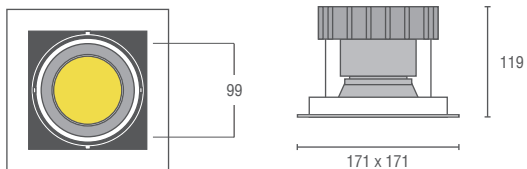


PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
22W	2000lm	4000K	60°
32W	3000lm		90°

ELEMENT L

Adjustable $\pm 15^\circ$ tilting angle.
 Completed with Lumileds replaceable led module.
 Remote led driver.
 Dimension in mm : 171 x 171 x 149 ; Cut Hole : 146 x 146

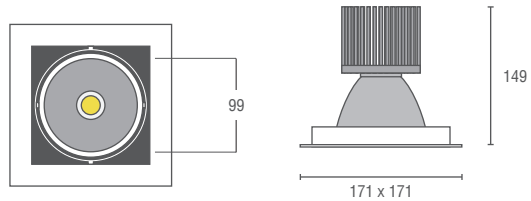


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	850lm	2700K	27°
10W	1000lm	3000K	37°
13W	1400lm	4000K	
18W	2000lm	5000K	
29W	3000lm		

ELEMENT X

Adjustable $\pm 15^\circ$ tilting angle.
 Completed with Xicato replaceable led module.
 Remote led driver.
 Dimension in mm : 171 x 171 x 149 ; Cut Hole : 146 x 146

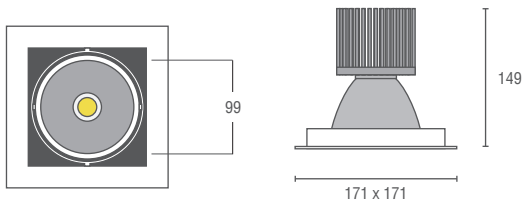

XICATO LED CRI 83

Wattage	Lumen	CCT	BeamAngle
7.8W	700lm	2700K	27°
11.7W	1300lm	3000K	37°
19.5W	2000lm	4000K	
29.3W	3000lm	5000K	

XICATO LED CRI 98

Wattage	Lumen	CCT	BeamAngle
9.7W	700lm	2700K	27°
15.6W	1300lm	3000K	37°
26.4W	2000lm	4000K	
		5000K	