


IP20 IP54 ADJ.   LED 0-10V DIM 



88mm recessed downlight  
 Mounting method : recessed ceiling mounted  
 Material : die cast aluminium housing and trim  
 Standard finishes : matt white / matt black  
 IP Rating : IP20 / IP54  
 Accessories : clear glass / frosted glass / honeycomb louve  
 Customized RAL upon request.  
 Dimmable driver available upon request.  
 Emergency kit available upon request.

## PIN

Non-adjustable.  
 Completed with Philips replaceable led module.  
 Remote led driver.  
 Dimension in mm : Ø88 x 94 ; Cut Hole Ø78

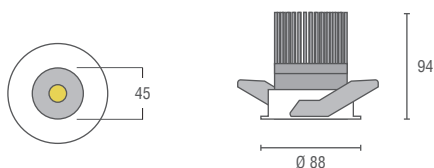


### PHILIPS LED CRI>90

Wattage	Lumen	CCT	BeamAngle
10W	1000lm	3000K	20°
15W	1300lm		

## PIN i

Adjustable with 360° rotating angle and 30° tilting angle.  
 Completed with Philips replaceable led module.  
 Remote led driver.  
 Dimension in mm : Ø110 x 101 ; Cut Hole Ø102

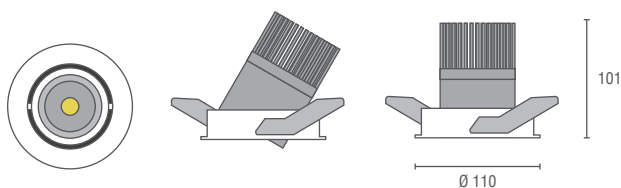

### PHILIPS LED CRI>90

Wattage	Lumen	CCT	BeamAngle
10W	1000lm	3000K	20°
15W	1300lm		