


IP44  LED 0-10V DIM 



LED Linear Light
 Mounting method : surface mounted
 Material : extruded aluminium housing. PC Diffuser
 Standard finishes : aluminium
 IP Rating : IP44
 Customized RAL upon request.
 Dimmable driver available upon request.

Non-adjustable.
 Completed with Lumileds led module.
 Remote led driver.
 Dimension in mm : 750 x 20 x 22 / 1000 x 20 x 22

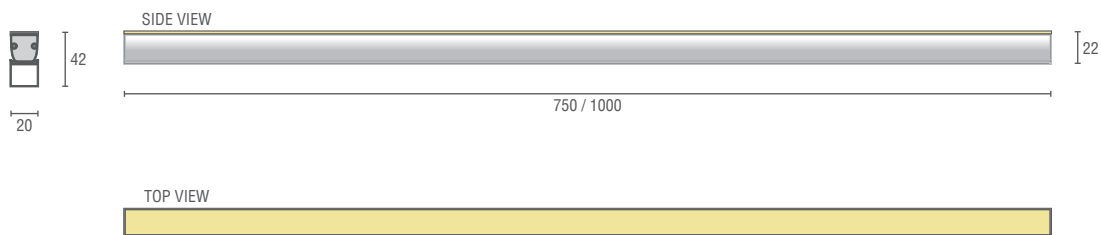

LINEAR750

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	Beam Angle
7.2W	700lm	3000K 4000K	Diffused

LINEAR1000

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	Beam Angle
9.6W	900lm	3000K 4000K	Diffused