

IP65

LED

0-10V

DIM



Ceiling mounted




Wall mounted



Pendant mounted




Wall Mounted (Up & down)

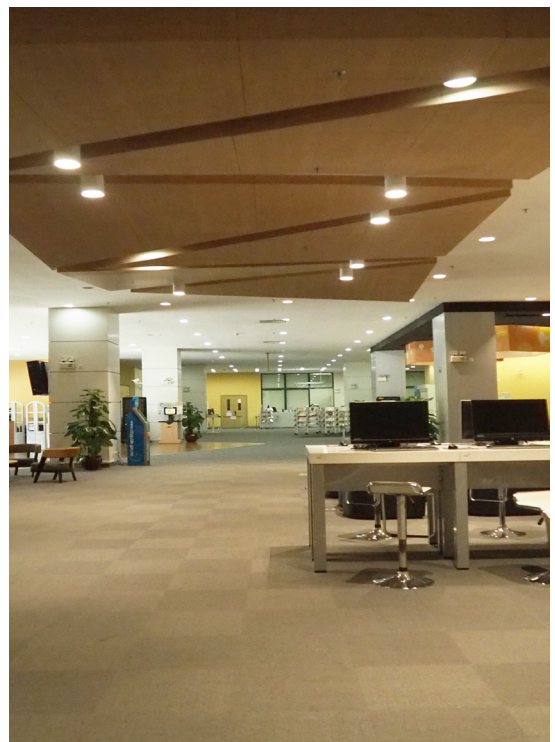

Outdoor LED downlight.
 Mounting method : ceiling mounted / wall mounted / pendant mounted
 Material : die cast aluminium housing
 Standard finishes : matt white / matt black
 IP Rating : IP65.
 Accessories : clear glass / frosted glass / honeycomb louvre.
 Customized RAL upon request.
 Dimmable driver available upon request.

AQUA JUNIOR

Non-Adjustable.
Completed with Philips / Lumileds replaceable led module.
Integrated led driver.
Dimension in mm : Ø127 x 189

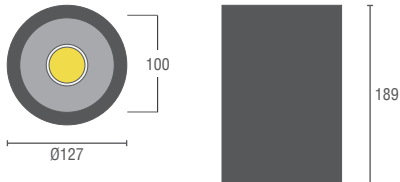

PHILIPS LED CRI>80


Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
22W	2000lm	4000K	60°
28W	3000lm		90°

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
10W	1000lm	2700K	27°
13W	1400lm	3000K	37°
18W	2000lm	4000K	
29W	3000lm	5000K	

AQUA

Non-Adjustable.
Completed with Philips / Lumileds / Xicato replaceable led module.
Integrated led driver.
Dimension in mm : Ø180 x 259

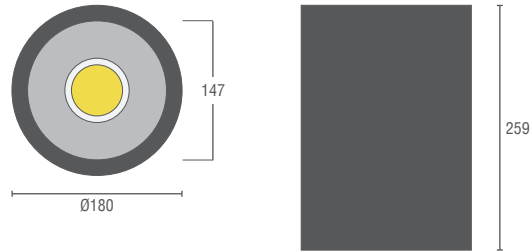

PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
22W	2000lm	4000K	60°
32W	3000lm		90°
42W	4000lm		

XICATO LED CRI 83


Wattage	Lumen	CCT	BeamAngle
11.7W	1300lm	2700K	25°
19.5W	2000lm	3000K	48°
29.3W	3000lm	3500K	
39.1W	4000lm	4000K	

XICATO LED CRI 98

Wattage	Lumen	CCT	BeamAngle
15.6	1300lm	2700K	25°
26.4	2000lm	3000K	48°
34.1	3000lm	3500K	
		4000K	

AQUA PLUS

Non-Adjustable.
Completed with Philips / Lumileds / Xicato replaceable led module.
Integrated led driver. DMX512 available upon request.
Dimension in mm : Ø180 x 342

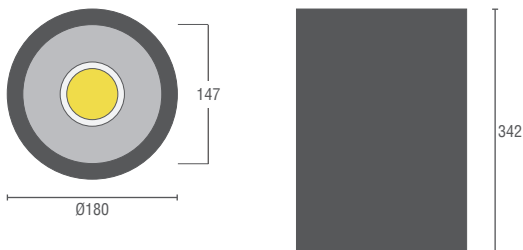

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
24W	2000lm	3000K	6°
		4000K	
		5000K	
		5700K	
		6500K	
		RGBW	