


IP20 IP44 ADJ.   LED 0-10V DIM 




Various finishes for the front ring

Anti-glare snout delivering outstanding performance

360 adjustable downlight
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing and trim
 Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

SPY

360° adjustable.
 Completed with Lumileds replaceable led module.
 Remote led driver.
 Dimension in mm : Ø124 x 134 ; Cut Hole : Ø115

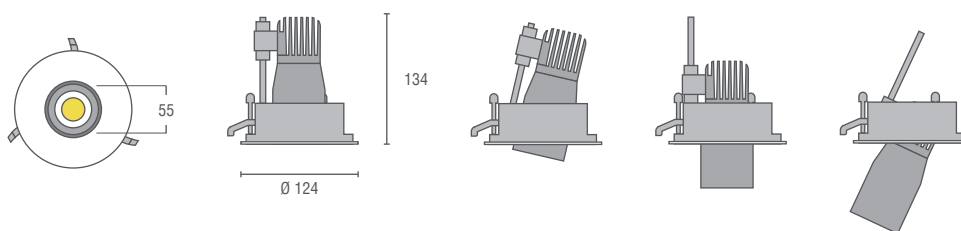

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	1000lm	2700K	15°
10W	1200lm	3000K	24°
		4000K	38°
		5000K	60°