

T350



IP67 ADJ. ↗ 220-240V

Outdoor LED floodlight. Mounting method : Surface mounted. High pressure die-cast aluminium housing in black finish. UV and IR free. Stainless steel adjustable mounting bracket. Completed with 350W 35000lm 2700K/ 3000K/ 4000K/ 6500K 60° high efficiency LED module from CREE or equivalent. Protection against dust and water IP67. Completed with waterproof cable, remote LED driver and waterproof gear box. Accessories : Glare shield / wire guard. Ideal for lighting to emphasize architectural details. Application areas : Area lighting, Facade lighting, Sport lighting, Advertising billboard lighting, swimming pool, tennis court


HOUSING FINISHES



RAL9005




DIMENSION

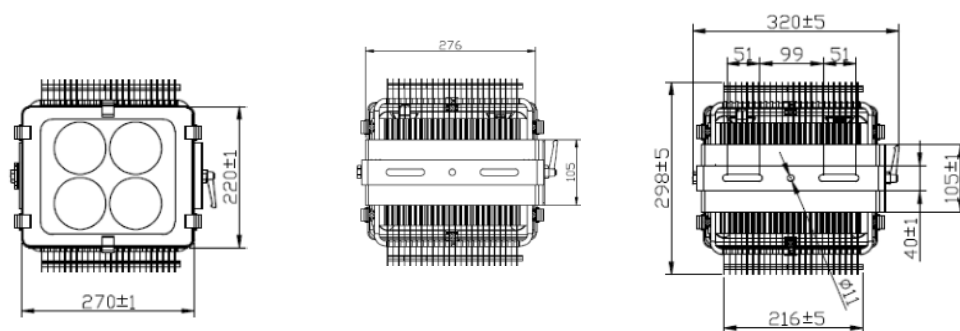

SPECIFICATION

Product	IP Rating	Light Source	Wattage	Lumen	CCT	Beam Angle	CRI	Voltage	Lumen Maintenance
T350	IP67	CREE or equivalent	350W	35000lm	2700K 3000K 4000K 6500K	60°	>70	220-240Vac	50,000 hours

Luminous emittance 1:



Due to missing symmetry properties, no UGR table can be displayed for this luminaire.

