


IP20 IP44 ADJ.   LED MR16 0-10V DIM 

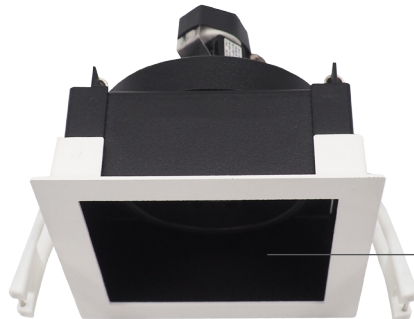


Deep recessed lamp position
for good glare control

83mm adjustable square downlight
Mounting method : recessed ceiling mounted
Material : die cast aluminium housing and trim
Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
IP Rating : IP20 / IP44
Accessories : clear glass / frosted glass / honeycomb louvre
Customized RAL upon request.
Dimmable driver available upon request.
Emergency kit available upon request.

SQ83

Adjustable $\pm 25^\circ$ tilting angle.
Completed with Lumileds / Xicato replaceable COB LED module.
Remote led driver.
Dimension in mm : 83 x 83 x 121 ; Cut hole : 77 x 77

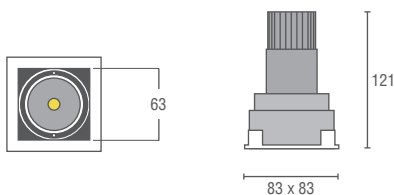

LUMILEDS LED CRI>80


Wattage	Lumen	CCT	BeamAngle
8W	1000lm	2700K	24°
10W	1200lm	3000K 4000K 5000K	45°

XICATO LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	1000lm	3000K	24°
10W	1200lm	4000K 5000K	45°

SQ83.MR16

Adjustable $\pm 25^\circ$ tilting angle.
Completed with GU5.3 lamp base for low voltage halogen lamp or led lamp.
Electronic transformer is not included.
Dimension in mm : 83 x 83 x 121 ; Cut hole : 77 x 77

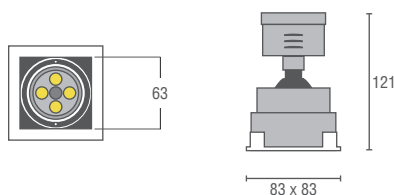

LOW VOLTAGE HALOGEN / LED LAMP

Lamp Base	Voltage
GU5.3	12V