



IP20 IP44 ADJ. ↻ LED 0-10V DIM ▲



Adjustable Spot light
 Mounting method : Track mounted or Ceiling mounted
 Material : die cast aluminium housing
 Standard finishes : matt white / matt black
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.

ARTISTIC

Adjustable.
 Completed with Lumileds / Xicato replaceable led module.
 Remote led driver.
 Dimension in mm : Ø73 x 130

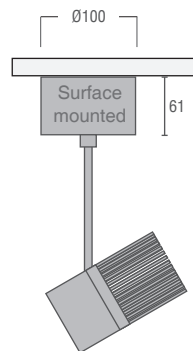

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
20W	2000lm	3000K	15°
		4000K	22°
		5000K	29°
		5700K	
		6500K	

XICATO LED CRI >80

Wattage	Lumen	CCT	BeamAngle
5.7W	400lm	2700K	24°
9.7W	700lm	3000K	40°
13W	1000lm	4000K	60°

XICATO LED CRI 95

Wattage	Lumen	CCT	BeamAngle
13.4W	700lm	2700K	24°
21.5W	1000lm	3000K	40°
		4000K	60°