


BRILLIANT PRO

IP65 ADJ. ↘ LED DIM ▲



Adjustable floodlight
 Mounting method : bracket mounted
 Material : extruded aluminium housing and frame, steel mounting bracket with black color powder coated
 UV and IR free.
 Standard finishes : matt white / matt black
 IP Rating : IP65
 Customized RAL upon request.
 Dimmable driver available upon request.
 1x, 2x, 4x, 6x module available upon request.

BRILLIANT PRO X 6

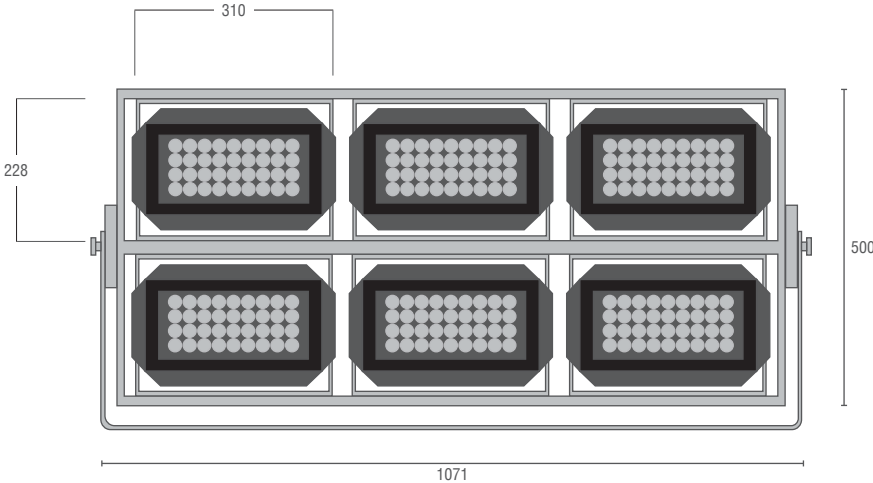

BRILLIANT PRO

Adjustable.
 Completed with Lumileds led module.
 Integrated led driver.
 Dimension in mm : 1071 x 500

LUMILEDS LED CRI 70

Wattage	Lumen	CCT	Beam Angle
55W	6000lm	3000K	11°
90W	8000lm	4000K	52°x12°
		5000K	
		5700K	
		6500K	

Note : Lamp specification for each module

BRILLIANT PRO X 1

