


IP20 IP44 ADJ.  LED MR16 0-10V DIM 

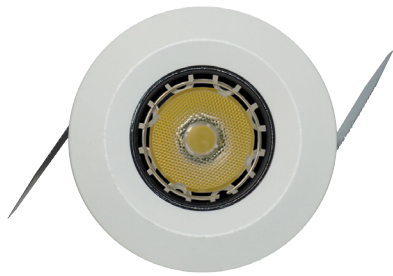


LED deep recessed position  
delivering outstanding performance

73mm accent downlight  
Mounting method : recessed ceiling mounted  
Material : die cast aluminium housing and trim  
Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze  
IP Rating : IP20 / IP44  
Accessories : clear glass / frosted glass / honeycomb louvre  
Customized RAL upon request.  
Dimmable driver available upon request.  
Emergency kit available upon request.


## ARROW.MR16

Non-Adjustable.  
Completed with GU5.3 lamp base for low voltage halogen lamp or led lamp.  
Electronic transformer is not included.  
Dimension in mm : Ø73 x 125 ; Cut hole : Ø67

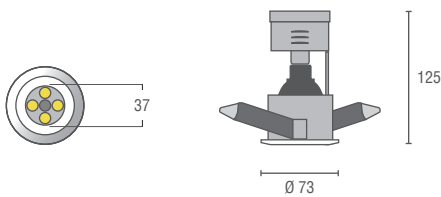

## ARROW i.MR16

Adjustable 25° tilting angle.  
Completed with GU5.3 lamp base for low voltage halogen lamp or led lamp.  
Electronic transformer is not included.  
Dimension in mm : Ø73 x 125 ; Cut hole : Ø67

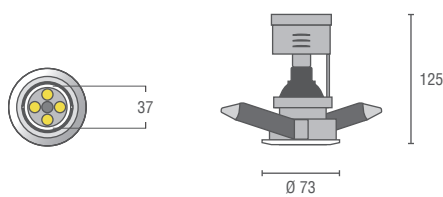

### MR16 LOW VOLTAGE HALOGEN / LED LAMP

Lamp Base	Voltage
GU5.3	12V

### MR16 LOW VOLTAGE HALOGEN / LED LAMP

Lamp Base	Voltage
GU5.3	12V

Note : Housing with GU5.3 socket can be replaced by COB led module on request