

BRILLIANT T


IP65

LED

DIM



Tunnel light.
Mounting method : recessed mounted.
Material : die cast aluminium housing. UV and IR free.
Standard finishes : matt white / matt black / aluminium.
IP Rating : IP65.
Customized RAL upon request.
Dimmable driver available upon request.

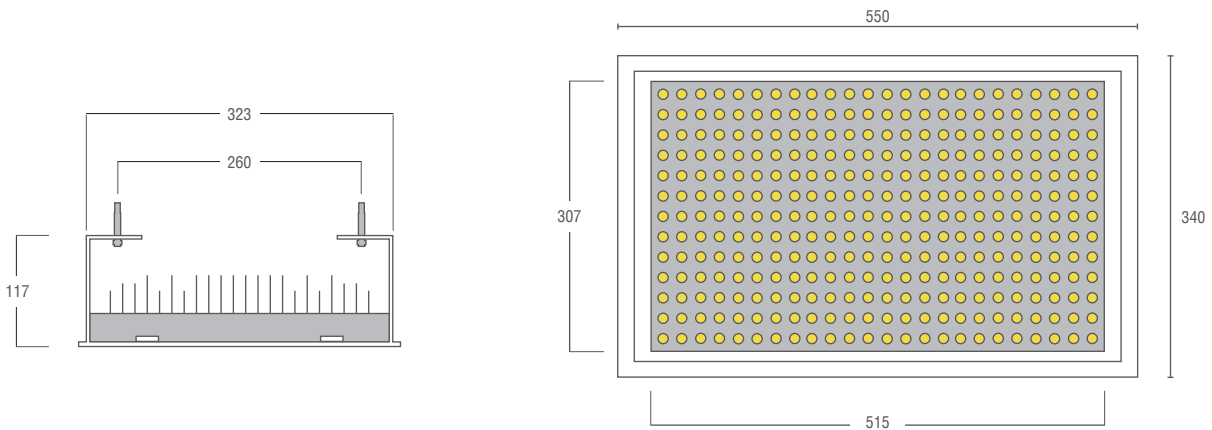

BRILLIANT T

Non-adjustable.
Completed with Lumileds led module.
Remote led driver.
Dimension in mm : 340 x 550 x 117

LUMILEDS LED CRI >80

Wattage	Lumen	CCT	Beam Angle
130W	12000lm	2700K	54°
250W	24000lm	3000K	70°
		4000K	
		5000K	