




IP20 IP54 ADJ.  LED 0-10V DIM 

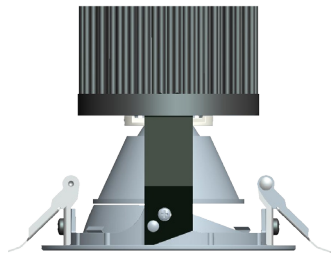


Adjustable with Lumileds LED

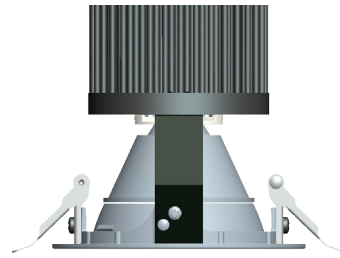

Non-adjustable with Lumileds LED

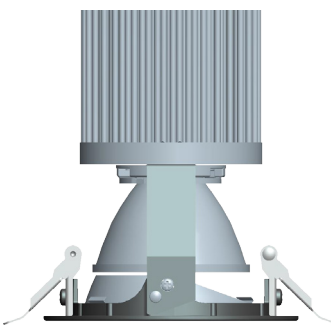

Adjustable with Xicato LED

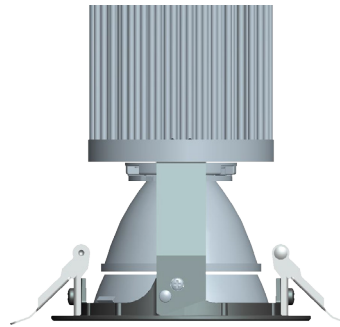

Non-adjustable with Xicato LED


116mm wall wash downlight
Mounting method : recessed ceiling mounted
Material : die cast aluminium housing and trim
Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
IP Rating : IP20 / IP54
Accessories : clear glass / frosted glass / honeycomb louvre
Customized RAL upon request.
Dimmable driver available upon request.
Emergency kit available upon request.



FIXED VERSION

COLOURE <2000lm

Non-adjustable.
Completed with Lumileds replaceable led module.
Remote led driver.
Dimension in mm : Ø116 x 110 ; Cut Hole : Ø105

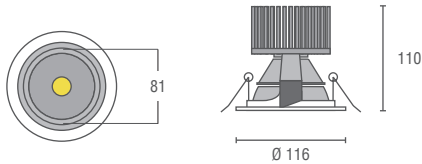


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
7W	850lm	2700K	15°
8W	1000lm	3000K	24°
10W	1400lm	4000K	38°
15W	2000lm	5000K	60°

COLOURE 3000lm

Non-adjustable.
Completed with Lumileds replaceable led module.
Remote led driver.
Dimension in mm : Ø116 x 130 ; Cut Hole : Ø105

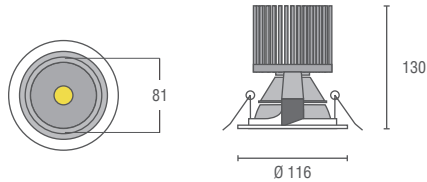


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
22W	3000lm	2700K	15°
		3000K	24°
		4000K	38°
		5000K	60°

COLOURE X

Non-adjustable.
Completed with Xicato replaceable led module.
Remote led driver.
Dimension in mm : Ø116 x 141 ; Cut Hole : Ø105

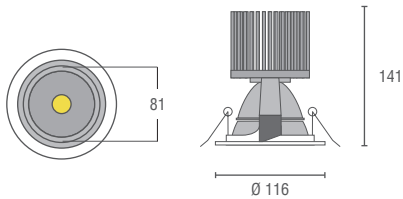

XICATO LED CRI>80

Wattage	Lumen	CCT	BeamAngle
5.7W	400lm	2700K	24°
9.7W	700lm	3000K	40°
13W	1000lm	4000K	60°
17.8W	1300lm		
28.8W	2000lm		


XICATO LED CRI>95

Wattage	Lumen	CCT	BeamAngle
13.4W	700lm	2700K	24°
21.5W	1000lm	3000K	40°
27.7W	1300lm	4000K	60°

ADJUSTABLE VERSION

COLOURE i2000lm

Adjustable 20° tilting angle.
Completed with Lumileds replaceable led module.
Remote led driver.
Dimension in mm : Ø116 x 110 ; Cut Hole : Ø105

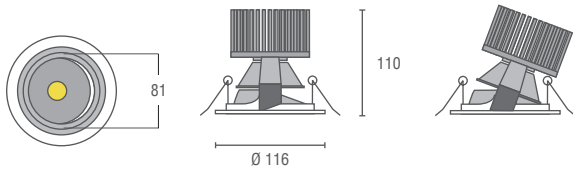


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
7W	850lm	2700K	15°
8W	1000lm	3000K	24°
10W	1400lm	4000K	38°
15W	2000lm	5000K	60°

COLOURE i3000lm

Adjustable 20° tilting angle.
Completed with Lumileds replaceable led module.
Remote led driver.
Dimension in mm : Ø116 x 130 ; Cut Hole : Ø105

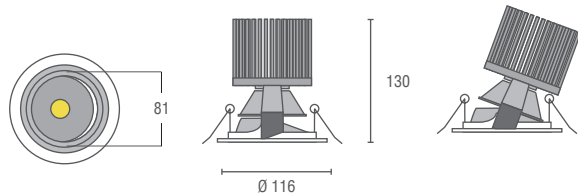


LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
22W	3000lm	2700K	15°
		3000K	24°
		4000K	38°
		5000K	60°

COLOURE iX

Adjustable 20° tilting angle.
Completed with Xicato replaceable led module.
Remote led driver.
Dimension in mm : Ø116 x 141 ; Cut Hole : Ø105

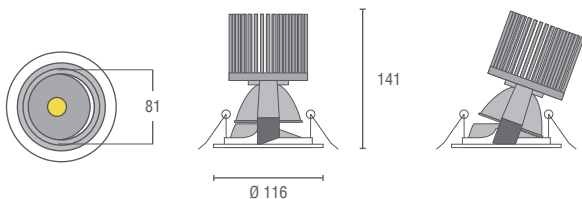

XICATO LED CRI>80

Wattage	Lumen	CCT	BeamAngle
5.7W	400lm	2700K	24°
9.7W	700lm	3000K	40°
13W	1000lm	4000K	60°
17.8W	1300lm		
28.8W	2000lm		

XICATO LED CRI>95

Wattage	Lumen	CCT	BeamAngle
13.4W	700lm	2700K	24°
21.5W	1000lm	3000K	40°
27.7W	1300lm	4000K	60°