


IP20 IP44 ADJ.   LED 0-10V DIM 



177mm adjustable wall wash downlight
 Mounting method : recessed ceiling mounted
 Material : die cast aluminium housing
 Standard finishes : matt white / matt black / polished chrome / dark chrome / brushed bronze
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

FACADE

Adjustable 25° tilting angle.
 Completed with Philips / Lumileds / Xicato
 replaceable led module.
 Dimension in mm : Ø177 x 175
 Cut Hole : Ø155

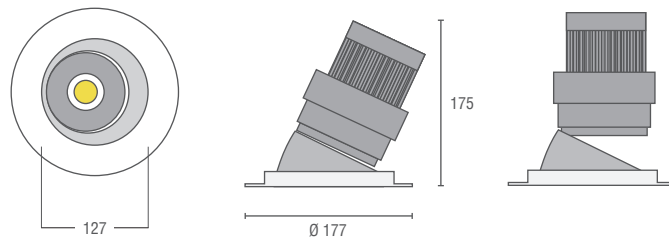

PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
15W	1400lm	3000K	27°
30W	3000lm	4000K	37°

XICATO LED CRI 83

Wattage	Lumen	CCT	BeamAngle
7.8W	700lm	2700K	27°
11.7W	1300lm	3000K	37°
19.5W	2000lm	4000K	
29.3W	3000lm	5000K	

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
8W	850lm	2700K	27°
10W	1000lm	3000K	37°
13W	1400lm	4000K	
18W	2000lm	5000K	
29W	3000lm		

XICATO LED CRI 98

Wattage	Lumen	CCT	BeamAngle
9.7W	700lm	2700K	27°
15.6W	1300lm	3000K	37°
26.4W	2000lm	4000K	
		5000K	