

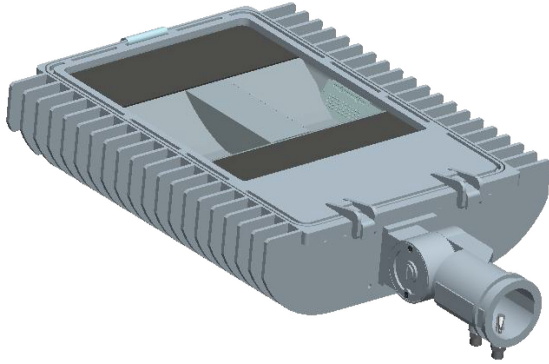


IP65 ADJ.  

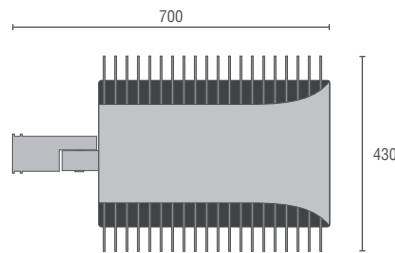

Adjustable floodlight
 Mounting method : surface mounted
 Material : die cast aluminium housing. UV and IR free
 Standard finishes : aluminium
 IP Rating : IP65
 Customized RAL upon request.

Application areas: parks, walkways, entrance, any outdoor areas, roadways, highways

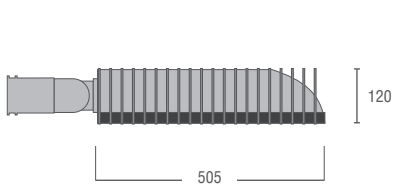

STRADA

Adjustable.
 Completed with Philips / Lumileds led module.
 Remote led driver.
 Dimension in mm : 700 x 430 x 120

PHILIPS LED CRI 70

Wattage	Lumen	CCT	Beam Angle
60W	8000lm	4000K	90°
86W	12000lm	5700K	

PHILIPS LED CRI 80

Wattage	Lumen	CCT	Beam Angle
62W	8000lm	4000K	90°
92W	12000lm	5700K	

LUMILEDS LED CRI 80

Wattage	Lumen	CCT	Beam Angle
104W	12000lm	2700K	90°
120W	14000lm	3000K	

STRADA PLUS

Adjustable.
 Completed with Philips / Lumileds led module.
 Remote led driver.
 Dimension in mm : 700 x 430 x 120

PHILIPS LED CRI 70

Wattage	Lumen	CCT	Beam Angle
172W	24000lm	4000K	60°
		5700K	

PHILIPS LED CRI 80

Wattage	Lumen	CCT	Beam Angle
184W	24000lm	4000K	60°
		5700K	

LUMILEDS LED CRI 80

Wattage	Lumen	CCT	Beam Angle
208W	24000lm	2700K	60°
		3000K	