



IP20 IP44  LED 0-10V DIM 

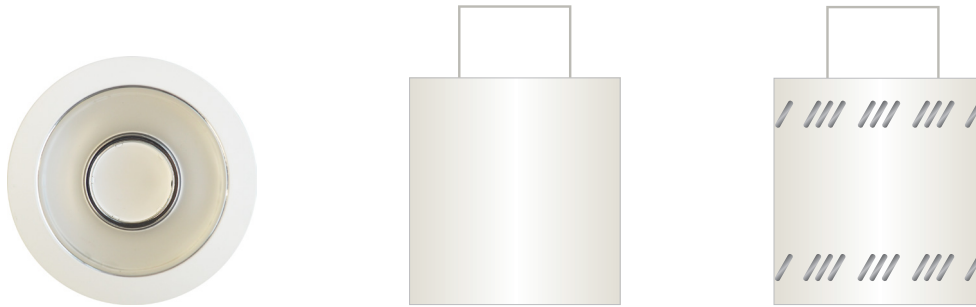

175mm Surface mounted downlight
 Mounting method : surface mounted
 Material : die cast aluminium housing and trim
 Standard finishes : matt white / matt black
 IP Rating : IP20 / IP44
 Accessories : clear glass / frosted glass / honeycomb louvre
 Customized RAL upon request.
 Dimmable driver available upon request.
 Emergency kit available upon request.

MIDI SM ≤2000lm

Non-adjustable.
 Completed with Philips / Lumileds replaceable led module.
 Integrated led driver.
 Dimension in mm : Ø175 x 188

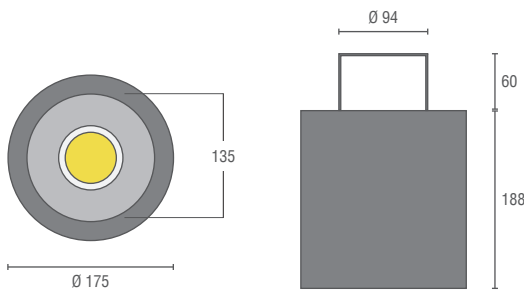

PHILIPS LED CRI>80


Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
22W	2000lm	4000K	60°
			90°

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
12W	1100lm	3000K	40°
20W	2000lm	4000K	60°
			90°

MIDI SM ≥3000lm

Non-adjustable.
 Completed with Philips / Lumileds replaceable led module.
 Integrated led driver.
 Dimension in mm : Ø175 x 188

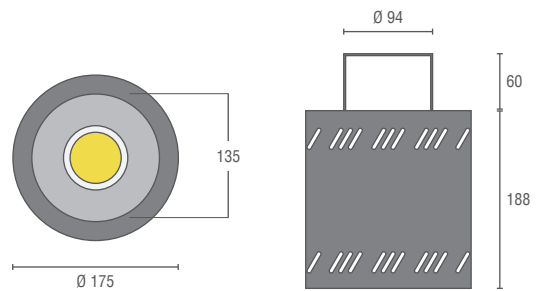

PHILIPS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
32W	3000lm	3000K	40°
		4000K	60°
			90°

LUMILEDS LED CRI>80

Wattage	Lumen	CCT	BeamAngle
30W	3000lm	3000K	40°
42W	4500lm	4000K	60°
			90°